# Modular Equipment 41000 Series

**Ice Cream Cabinet - Stainless Steel Top**
**Remote**

ITEM # _____

PROJECT _____

_____

_____

DATE _____

| MODEL | LENGTH |
|---|---|
| L-41118 | 18" |
| L-41132 | 32" |
| L-41142 | 42" |
| L-41154 | 54" |

DEPTH
28" OR 32"



*L-41142 shown with options*

## SPECIFICATIONS:

**TOP**: Die-formed construction of one-piece 16 GA stainless steel type 304-#4 finish with 2 5/8" nosing, Backsplash to be 3/8" coved, 6" high x 2 1/8" wide, Sheared ends fitted with recessed 12 GA steel bars for adjoining units, producing a hairline seam

**OPENINGS:** Die-formed raised, with high impact thermal breaker frames, Covers hinged in middle, insulated and removable, Openings will accomodate 3-gallon containers stacked 2 high

**EXTERIOR**: Back, bottom, and sides of 20 GA steel with painted enamel finish, Body supported by 14 GA galvanized steel box channels for legs

**INTERIOR**: Compartment of 22 GA stainless steel type 304-#2B finish, Liner has cold wall type construction and maintains a temperature of -5 to 0 degrees F

**INSULATION**: Rigid Polyurethane Foam

**FRONT**: Exterior removable panels of one-piece die-stamped 22 GA stainless steel type 304-#4 finish

**LEGS**: 6" high legs, 1 5/8" tubing welded to steel plate and fastened to body support channels, Bullet-foot has 1 1/8" of adjustment, All legs are stainless steel

**REFRIGERATION:** Remote unit has an expansion valve system with temperature control, Expansion valve located behind one of the front panels, System comes assembled with junction box ready for final connection, Base tested to operate between -5 and 0 degrees F

## FEATURES

- 16 GA reinforced top
- Remote unit
- All Stainless Steel Interior lining with cold wall construction
- Refrigeration system has expansion valve & control for rapid recovery
- Uniform integration in design, quality and parts
- 3-gallon containers stack two high

## OPTIONS

- S/S Ends

# Modular Equipment L-41000 Series - Ice Cream Cabinets

## DIMENSIONAL DATA

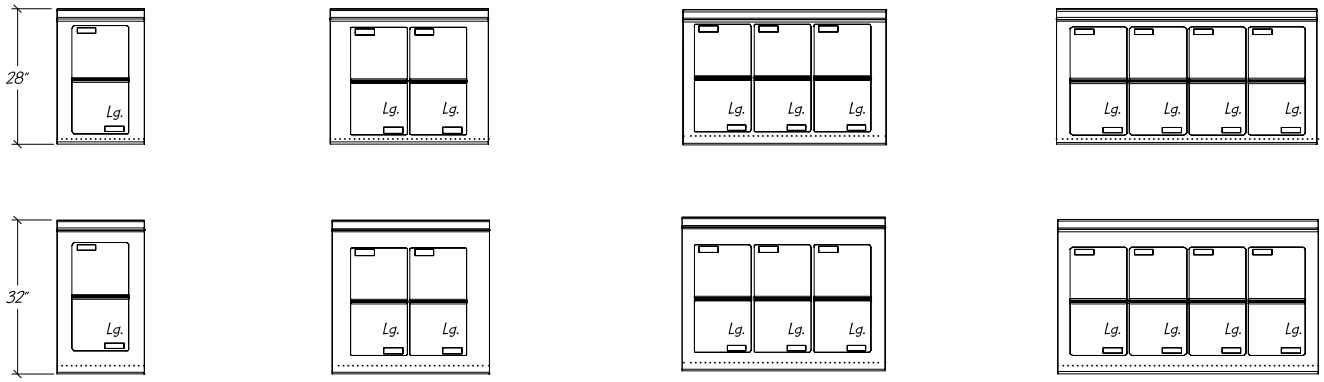


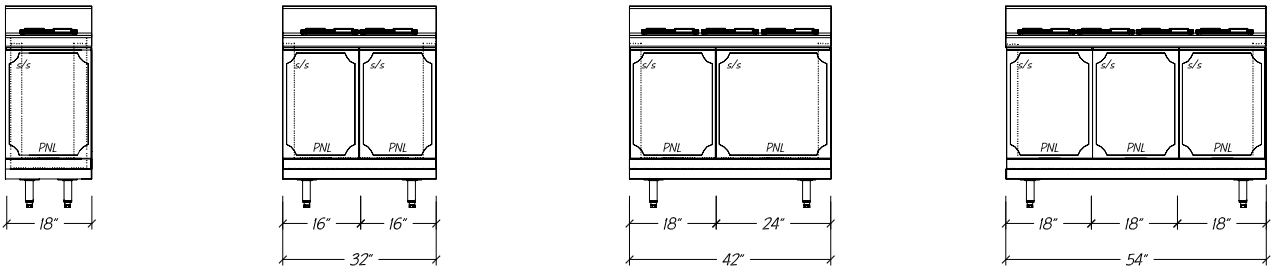


L-41118 L-41132 L-41142 L-41154




## STATISTICAL DATA

| MODEL | LGTH | # OF LIDS | GALLON CAPACITY | | VOLTS/ CYCLE/ PHASE | REC HP COMP 404A i. | SHIP WT. |
|---|---|---|---|---|---|---|---|
| | | | # OF 3 GAL. CONTAINERS | TOTAL GAL. | | | |
| L-41118 | 18" | 1 lg | 4 | 12 | 115v/60/1 | 1/4 | 225# |
| L-41132 | 32" | 2 lg | 8 | 24 | 115v/60/1 | 1/4 | 290# |
| L-41142 | 42" | 3 lg | 12 | 36 | 115v/60/1 | 1/4 | 325# |
| L-41154 | 54" | 4 lg | 16 | 48 | 115v/60/1 | 1/3 | 370# |




### Modular Equipment 41000 Series MECHANICAL DATA

RL Refrigeration Lines, 1/4" inlet and 3/8" suction 8" AFF

V Expansion Valve 28" AFF

C Centered over freezer compartment




**Notes:** i. Recommended HP with up to 25 ft of refrigeration lines (at installers discretion)