Modular Equipment 12000-B Series

Bloomington-Style
Recessed Opening - Salad Top
Self-contained Refrigerated Base

ITEM # _____

PROJECT _____

_____

_____

DATE _____

MODEL	LENGTH
L-12138-B	38"
L-12150-B	50"
L-12156-B	56"
L-12162-B	62"
L-12168-B	68"
L-12174-B	74"
L-12180-B	80"
L-12186-B	86"
L-12192-B	92"
L-12198-B	98"
L-12104-B	104"
L-12110-B	110"

DEPTH
28" OR 32"



L-12186-B shown with options (pans not included)

SPECIFICATIONS:

TOP: Die-formed construction of one-piece 16 GA stainless steel type 304-#4 finish with recessed 12 GA steel bars for reinforcement

EXTERIOR: Back, bottom, and sides of 20 GA steel with painted enamel finish, Body supported by 14 GA galvanized steel box channels for legs

INTERIOR: Bottom, Back, and Top of 22 GA stainless steel type 304-#2B finish, sides of one-piece high impact plastic

DOOR JAMS: One-piece high-impact plastic with concealed magnets on perimeter for positive sealing

DOORS: Exterior of one-piece die-stamped 22 GA stainless steel type 304-#4 finish, Interior of high-impact plastic, Gasket mounted w/ aluminum strips and screws for easy removability and to ensure a proper seal, Doors mounted on 12 GA spring-loaded self-closing hinges, Stainless handle with stamped grip

SHELVES: One, removable heavy-steel frame epoxy-coated shelf per door

LEGS: 8" high legs standard, 1 5/8" tubing welded to steel plate and fastened to body support channels, Bullet-foot has 1 1/8" of adjustment, All legs are stainless steel

BLOOMINGTON STYLE RECESSED PAN - SALAD TOP: NSF standard #7 compartment of 22 GA stainless steel 304-#2B finish, Mechanically-cooled, cold wall tank is controlled by its own pressure control with on/off switch, 3" Recessed openings can accommodate fractional-size pans up to 6" deep, Pans to sit on removable clip mounted to inside of tank with plastic thumb screws, Tank is tested to hold "product" temperature between 33-41 degrees Fahrenheit *(pans not included)*

REFRIGERATION: Self-contained unit has a high-temperature balanced system using a hermetically sealed condenser, Forced-air evaporator with protective-coated coil and expansion valve, System comes assembled with cord and 5-15-P plug, Base tested to operate between 36 and 40 degrees F

****RAIL PERFORMANCE:**
CONDIMENTS MUST BE REMOVED AT NIGHT TO PREVENT FREEZING OF RAIL/PRODUCT, ON/OFF SWITCH IS PROVIDED IN FRONT PANEL TO CONTROL RAIL (ONLY)

FEATURES


- 16 GA reinforced top
- Self-contained unit
- Self-closing doors
- Cold-wall construction 3" recessed opening
- Wrapped tank flat top for fractional size pans (pans not incl)
- NSF cutting board
- (1) Wire shelf per door
- Refrigeration system has expansion valve & temp. control for rapid recovery
- Uniform integration in design, quality and parts

OPTIONS


- Casters (specify working height)
- Compressor Left
- Custom Openings
- Drawers (n/a under pan opening)
- Bun Pan Racks (pans by others)

Modular Equipment L-12000-B Series - Bloomington-Style Recessed Opening


DIMENSIONAL DATA




L-12138-B




L-12162-B




L-12180-B

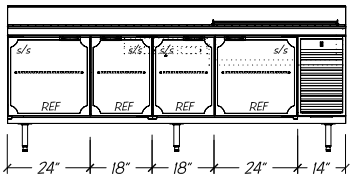


L-12198-B




L-12150-B




L-12168-B




L-12186-B

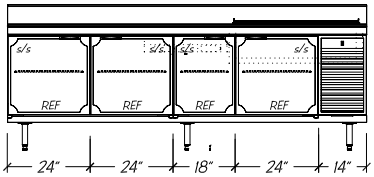


L-12104-B




L-12156-B




L-12174-B




L-12192-B

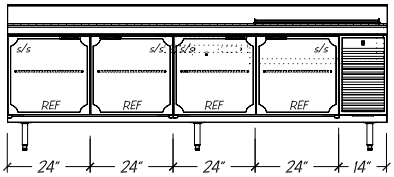

L-12110-B







STATISTICAL DATA

MODEL	LGTH	QTY 1/6 SIZE PANS [ii]	SHELVES PER UNIT	CONDENSING UNIT [iii]	VOLTS/ CYCLE/ PHASE	TOTAL AMPS [iv]	NEMA PLUG	SHIP WT.
L-12138-B	38"	6	1	1/4-HP R-134A	115v/60/1	7.75	5-15-P	375#
L-12150-B	50"	6	2	1/4-HP R-134A	115v/60/1	7.75	5-15-P	420#
L-12156-B	56"	8	2	1/4-HP R-134A	115v/60/1	7.75	5-15-P	460#
L-12162-B	62"	8	2	1/4-HP R-134A	115v/60/1	8.38	5-15-P	495#
L-12168-B	68"	8	3	1/4-HP R-134A	115v/60/1	8.38	5-15-P	530#
L-12174-B	74"	10	3	1/4-HP R-134A	115v/60/1	8.38	5-15-P	565#
L-12180-B	80"	10	3	1/4-HP R-134A	115v/60/1	8.38	5-15-P	605#
L-12186-B	86"	10	3	1/3-HP R-134A	115v/60/1	10.78	5-15-P	640#
L-12192-B	92"	10	4	1/3-HP R-134A	115v/60/1	10.78	5-15-P	665#
L-12198-B	98"	10	4	1/3-HP R-134A	115v/60/1	10.78	5-15-P	690#
L-12104-B	104"	10	4	1/3-HP R-134A	115v/60/1	10.78	5-15-P	710#
L-12110-B	110"	10	4	1/3-HP R-134A	115v/60/1	10.78	5-15-P	735#

Standard
Self-closing Doors




Optional
Refrigerated Drawers



"Drawers not available in front of rail"

Optional
26" Refrigerated Drawers
(adds 2" to unit length)



shown w/ optional
full extension drawer slides

Notes:
i. Compressor left available with recessed opening mirror imaged, opening position relative to compressor position
ii. Pans not included
iii. Custom units may require modified BTU ratings and/or condensing unit HP
iv. Optional hot gas condensate evaporator is factory recommended, if electric evaporator is required, add 0.39 AMP to total

Modular Equipment 12000 Series MECHANICAL DATA

(C) Condensing unit wired to junction box 24" AFF, rear of condenser compartment is open for cord to exit 115V/60/1

S On/off switch 24" AFF with 8 foot cord and plug 5-15-P

D 5/8" OD copper drain for condensate evaporator 14 1/2" AFF

On/off switch for rail

