

**Production Equipment 2500-BMT**

Maple Top - Bakers Table Only  
Self-contained



2562-BMT shown with options

**SPECIFICATIONS:**

**TOP:** Top grade hard maple NSF approved with ends and back riser to have sanitary covered corners

**EXTERIOR:** Back and bottom of 20 GA steel with painted enamel finish, Body supported by 14 GA galvanized steel box channels for casters, Ends of 20 GA stainless steel, type 304-#4 finish, integrally welded to top

**INTERIOR:** Bottom, Back, and Top of 22 GA stainless steel type 304-#2B finish, sides of one-piece high impact plastic

**INSULATION:** Rigid Polyurethane Foam

**DOOR JAMS:** One-piece high-impact plastic with concealed magnets on perimeter for positive sealing

**DOORS:** Exterior of one-piece die-stamped 22 GA stainless steel type 304-#4 finish, Interior of high-impact plastic, Gasket mounted w/ aluminum strips and screws for easy removability and to ensure a proper seal, Doors mounted on 12 GA spring-loaded self-closing hinges, Stainless handle with stamped grip

**SHELVES:** One, removable heavy-steel frame vinyl-coated shelf, per door

**CASTERS:** (Standard) Removable 6 1/4" high with 5" diameter wheels, front casters include brakes

**REFRIGERATION:** Unit has a high-temperature balanced system using a hermetically sealed condenser. Forced-air evaporator with protective-coated coil and expansion valve, System comes assembled with cord and 5-15-P plug, base tested to operate between 36 and 40 degrees F

ITEM # \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_

MODEL	DIM
2562-BMT	62"L x 32"D
2586-BMT	86"L x 32"D
2510-BMT	110"L x 32"D

**FEATURES**

- Self-contained unit
- Stainless steel end
- 1 1/4" thick Maple Top
- Condensate Evaporator
- 6-1/4" swivel casters
- Self-closing hinges
- (1) Wire shelf per door

**OPTIONS**

- Legs in lieu of casters
- Bun pan racks to hold 18" x 26" bun pans (pans by others)
- Drawers in lieu of door
- Stainless steel back

# Production Equipment 2500-BMT

Maple Top - Bakers Table Only

Self-contained



2562-BMT



2586-BMT



2510-BMT

## OPTIONS

**Removable Bun Pan Racks**  
In place of (1) shelf per door




**Refrigerated Drawers**  
Two drawers replace 1 door



## STATISTICAL DATA

MODEL	LGTH	SHELVES PER UNIT	CONDENSING UNIT	VOLTS/ CYCLE/ PHASE	TOTAL AMPS	NEMA PLUG	SHIP WT.
2562-BMT	62"	2	1/4-HP R-134A	115v/60/1	8.38	5-15-P	410#
2586-BMT	86"	3	1/3-HP R-134A	115v/60/1	10.78	5-15-P	630#
2510-BMT	110"	4	1/3-HP R-134A	115v/60/1	11.42	5-15-P	785#

## MECHANICAL DATA

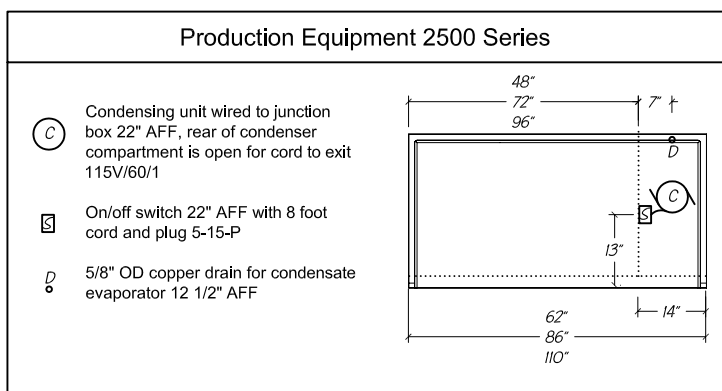

## SECTION VIEW

