

Production Equipment 2000-ST

Stainless Steel Top
Self-contained



2067-ST shown with options

SPECIFICATIONS:

TOP: Die-formed construction of one-piece 16 GA stainless steel type 304-#4 finish with recessed 12 GA steel bars for reinforcement

EXTERIOR: Back and bottom of 20 GA steel with painted enamel finish, Body supported by 14 GA galvanized steel box channels for casters, Ends of 20 GA stainless steel, type 304-#4 finish, integrally welded to top

INTERIOR: Bottom, Back, and Top of 22 GA stainless steel type 304-#2B finish, sides of one-piece high impact plastic

INSULATION: Rigid Polyurethane Foam

DOOR JAMS: One-piece high-impact plastic with concealed magnets on perimeter for positive sealing

DOORS: Exterior of one-piece die-stamped 22 GA stainless steel type 304-#4 finish, Interior of high-impact plastic, Gasket mounted w/ aluminum strips and screws for easy removability and to ensure a proper seal, Doors mounted on 12 GA spring-loaded self-closing hinges, Stainless handle with stamped grip

SHELVES: Two, removable heavy-steel frame vinyl-coated shelves, per door

CASTERS: (Standard) Removable 6 1/4" high with 5" diameter wheels, front casters include brakes

REFRIGERATION: Unit has a high-temperature balanced system using a hermetically sealed condenser. Forced-air evaporator with protective-coated coil and expansion valve, System comes assembled with cord and 5-15-P plug, base tested to operate between 36 and 40 degrees F

ITEM # _____

PROJECT _____

DATE _____

MODEL	DIM
2067-ST	67"L x 32"D
2093-ST	93"L x 32"D

FEATURES

- 16 GA reinforced top
- Self-contained unit
- Stainless steel ends
- Condensate Evaporator
- 6-1/4" swivel casters
- Self-closing hinges
- (2) Wire shelves per door

OPTIONS

- Legs in lieu of casters
- Bun pan racks to hold 18" x 26" bun pans (pans by others)
- Drawers in lieu of door
- 17" wide overshef(s)
- Stainless steel back

Production Equipment 2000-ST

Stainless Steel Top

Self-contained



2067-ST



2093-ST

OPTIONS

Removable Bun Pan Racks
In place of (2) shelves per door



Refrigerated Drawers
Three drawers replace 1 door with (2) 12x20x4 polycarbonate pans per drawer




(1) set available on 2067 (left door)
(2) sets available on 2093 (ends only)

STATISTICAL DATA

MODEL	LGTH	SHELVES PER UNIT	CONDENSING UNIT	VOLTS/ CYCLE/ PHASE	TOTAL AMPS	NEMA PLUG	SHIP WT.
2067-ST	67"	4	1/4-HP R-134A	115v/60/1	8.38	5-15-P	390#
2093-ST	93"	6	1/3-HP R-134A	115v/60/1	10.78	5-15-P	535#

MECHANICAL DATA

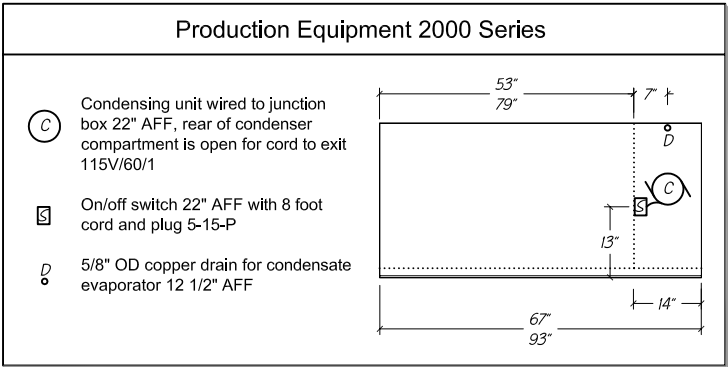

SECTION VIEW

